

WINTERING

OZONATOR

Switching off your filtering will switch off your Ozonator.
No precaution to consider.

REGULATION

As the ozonator, regulator will stop when your filtering stops.
On the regulator no precaution to consider neither.

HOWEVER, A VERY IMPORTANT ELEMENT: “THE PROBES”

It is imperative that the end of both probes stays:


- In contact with water (membrane should always be humid to avoid drying and destruction)
- Out of freeze



Before beginning to remove, think about identify wires, probes and their places in order to facilitate reassembling.

Place both probes in a glass containing 5 to 6 cm of water. Keep it all out of freeze.

REASSEMBLING

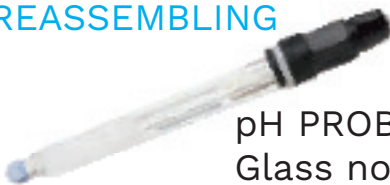

pH PROBE
Glass nozzle
to replace left side
Wire under regulation
left side



O.R.P PROBE
Metal nozzle
to replaceright side
Wire under regulation
right side

THINK NOW ABOUT PREVENT TREATING YOUR POOL WATER
WITH WINTERING PRODUCTS